

TECHNICAL DATA SHEET



**ALTERNATOR PRO35S D/4**

*Three-Phase brushless synchronous alternator with AVR - 4 poles*

## PRO35S D/4

### COMMON DATA

|                      |                     |  |              |
|----------------------|---------------------|--|--------------|
| Rated Power at 50Hz  | kVA                 | 550  |              |
| Rated Power at 60Hz  | kVA                 | 660  |              |
| Rated Power Factor   |                     | 0,8  |              |
| Nominal Temperature  | °C                  | 40   |              |
| Control System       |                     | self-excited   |              |
| Execution            |                     | brushless  |              |
| Regulation Type      |                     | AVR  |              |
| Insulation Class     |                     | H  |              |
| Protection           |                     | IP23   |              |
| Maximum Over speed   | rpm                 | 2250   |              |
| Overload             |                     | 110% of rated power for one hour in a cycle of 6 hours |              |
| Air Flow Requirement | m <sup>3</sup> /min | 54,3 at 50Hz   | 65,2 at 60Hz |
| R.F.I. Suppression   |                     | Standard EN55011                                       |              |

### REGULATION DATA

|                         |  |                         |
|-------------------------|--|-------------------------|
| AVR                     |  | HVR30                   |
| Sensing                 |  | three-phase             |
| Voltage Regulation      |  | ±1%                     |
| Sustained Short Circuit |  | > 300% of rated current |

### WINDING DATA

|                           |                 |                                     |  |
|---------------------------|-----------------|-------------------------------------|--|
| Stator Winding            |                 | Double layer with auxiliary winding |  |
| Rotor Winding             |                 | with damping cage                   |  |
| Winding Pitch             |                 | 2/3                                 |  |
| Number of Leads of Stator |                 | 12                                  |  |
| Stator Winding Resistance | Ω               | 0,0025 at 20°C                      |  |
| Rotor Winding Resistance  | Ω               | 1,21 at 20°C                        |  |
| Exciter Stator Resistance | Ω               | 12,5 at 20°C                        |  |
| Exciter Rotor Resistance  | Ω               | 0,095 at 20°C                       |  |
| THD at full load          |                 | <3%                                 |  |
| THD at no load            |                 | <2,5%                               |  |
| Excitation at no load     | A <sub>dc</sub> | 0,52                                |  |
| Excitation at full load   | A <sub>dc</sub> | 2,35                                |  |

### STANDARD

|            |                             |
|------------|-----------------------------|
| References | EN60034-1 ISO8528-3 EN55011 |
|------------|-----------------------------|

### ON REQUEST

UL 1446, Systems of Insulating Materials - General CSA-C22.2 No. 0, Appendix B, General Requirements - Canadian Electrical Code, Part I

## PRO35S D/4

### ELECTRICAL DATA

| Frequency                              |     | 50Hz - 1500rpm |         |         |         | 60Hz - 1800rpm |         |         |         |
|--|-----|----------------|---------|---------|---------|----------------|---------|---------|---------|
|  |     | 380/220        | 400/230 | 415/240 | 440/254 | 415/240        | 440/254 | 460/266 | 480/277 |
| Voltage Series Star                    | V   |                |         |         |         |                |         |         |         |
|  | kVA | 550            | 550     | 550     | 500     | 580            | 635     | 660     | 660     |
| Rated Power in Class H<br>(125°C/40°C) | kW  | 440            | 440     | 440     | 400     | 464            | 508     | 528     | 528     |
|  | kVA | 495            | 495     | 495     | 465     | 510            | 575     | 590     | 590     |
| Rated Power in Class F<br>(105°C/40°C) | kW  | 396            | 396     | 396     | 372     | 408            | 460     | 472     | 472     |
|  | kVA | 580            | 580     | 570     | 540     | 615            | 665     | 695     | 695     |
| Rated Power Standby<br>(150°C/40°C)    | kW  | 464            | 464     | 456     | 432     | 492            | 532     | 556     | 556     |
|  | kVA | 605            | 605     | 600     | 570     | 640            | 695     | 725     | 725     |
| Rated Power Standby<br>(163°C/27°C)    | kW  | 484            | 484     | 480     | 456     | 512            | 556     | 580     | 580     |

### EFFICIENCY IN CL. H

|     |       |  |  |  |  |  |  |       |
|-----|-------|--|--|--|--|--|--|-------|
| 4/4 | 95,0% |  |  |  |  |  |  | 95,9% |
| 3/4 | 95,5% |  |  |  |  |  |  | 96,5% |
| 2/4 | 94,3% |  |  |  |  |  |  | 95,6% |
| 1/4 | 90,5% |  |  |  |  |  |  | 91,4% |

### REACTANCES AND TIME CONSTANTS

|  |  |        |       |       |       |       |       |       |       |
|--|--|--------|-------|-------|-------|-------|-------|-------|-------|
| pcc  |  | 0,35   |       |       |       |       |       |       |       |
| X <sub>d</sub> - dir. axis synchronous         |  | 398%   | 359%  | 334%  | 270%  | 422%  | 411%  | 391%  | 359%  |
| X' <sub>d</sub> - dir. axis transient          |  | 18,8%  | 17,0% | 15,8% | 12,8% | 20,0% | 19,5% | 18,5% | 17,0% |
| X'' <sub>d</sub> - dir. axis subtransient      |  | 12,2%  | 11,0% | 10,2% | 8,3%  | 12,9% | 12,6% | 12,0% | 11,0% |
| X <sub>q</sub> - quad. axis reactance          |  | 233%   | 210%  | 195%  | 158%  | 247%  | 240%  | 229%  | 210%  |
| T' <sub>do</sub> - O.C. field time constant    |  | 2298ms |       |       |       |       |       |       |       |
| T' <sub>d</sub> - Transient time constant      |  | 109ms  |       |       |       |       |       |       |       |
| T'' <sub>d</sub> - Sub-transient time constant |  | 10ms   |       |       |       |       |       |       |       |

### MECHANICAL DATA


|                                 |           |    |             |
|---------------------------------|-----------|----|-------------|
| Bearing non drive end           |           |    | 6316-2RS-C3 |
| Bearing drive end (B3/B14 form) |           |    | 6319-2RS-C3 |
| Weight of generator             | in B2     | kg | 1342,5      |
|                                 | in B3/B14 | kg | 1356,5      |
|                                 | in B3/B9  | kg | \           |

# PRO35S D/4


## MOMENT OF INERZIA

|         |                   |        |
|---------|-------------------|--------|
| B3/B9   | kg·m <sup>2</sup> | \      |
| SAE 7½  | kg·m <sup>2</sup> | \      |
| SAE 8   | kg·m <sup>2</sup> | \      |
| SAE 10  | kg·m <sup>2</sup> | \      |
| SAE 11½ | kg·m <sup>2</sup> | \      |
| SAE 14  | kg·m <sup>2</sup> | 10,189 |
| SAE 18  | kg·m <sup>2</sup> | 10,529 |
| B3/B14  | kg·m <sup>2</sup> | 9,674  |

## DERATING CURVES

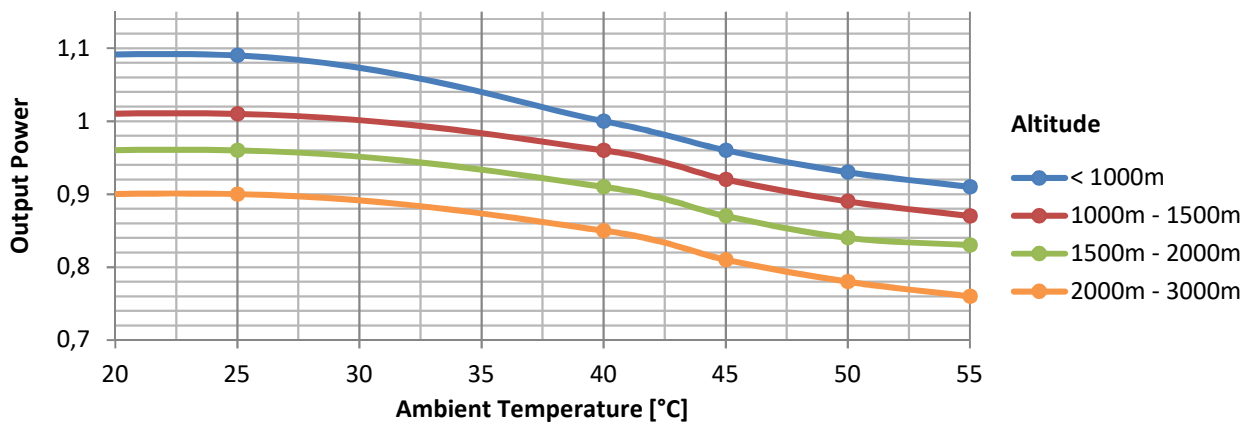


## WIRING DIAGRAM

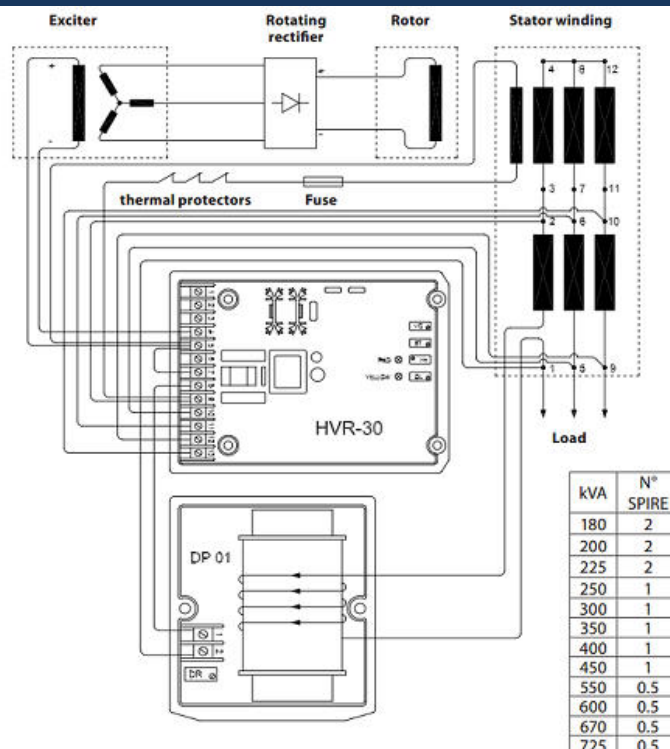

# PRO35S D/4


## TRANSIENT VOLTAGE VARIATION 50Hz

### Transient Voltage Variation @ 50Hz

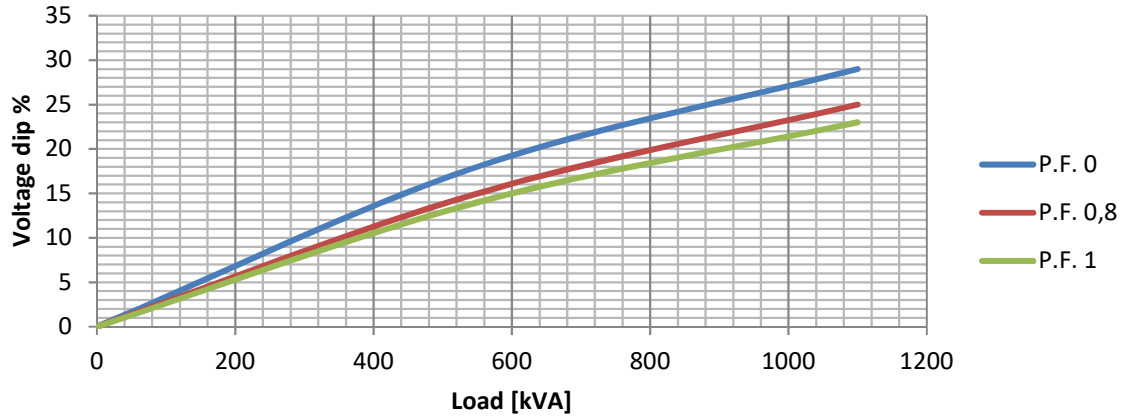

## TRANSIENT VOLTAGE VARIATION 60Hz


### Transient Voltage Variation @ 60Hz

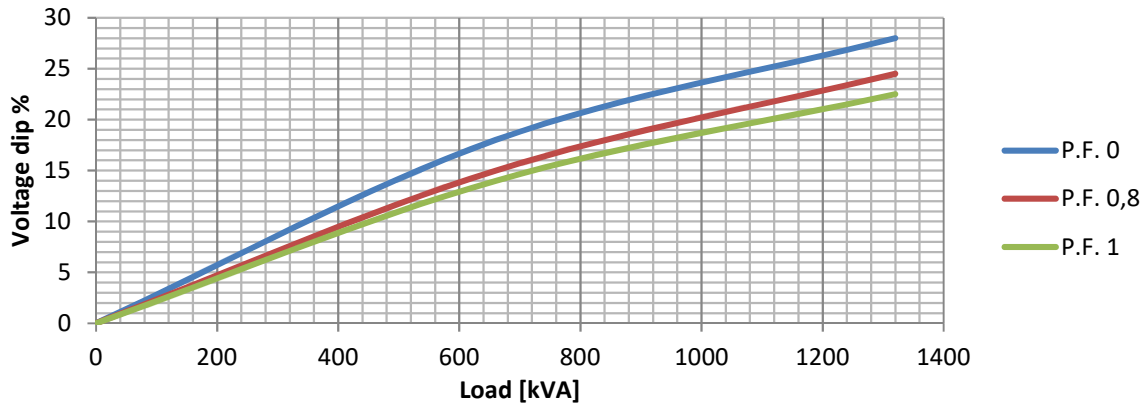

# PRO35S D/4


## EFFICIENCY 50Hz

### Efficiency Curves @ 50Hz

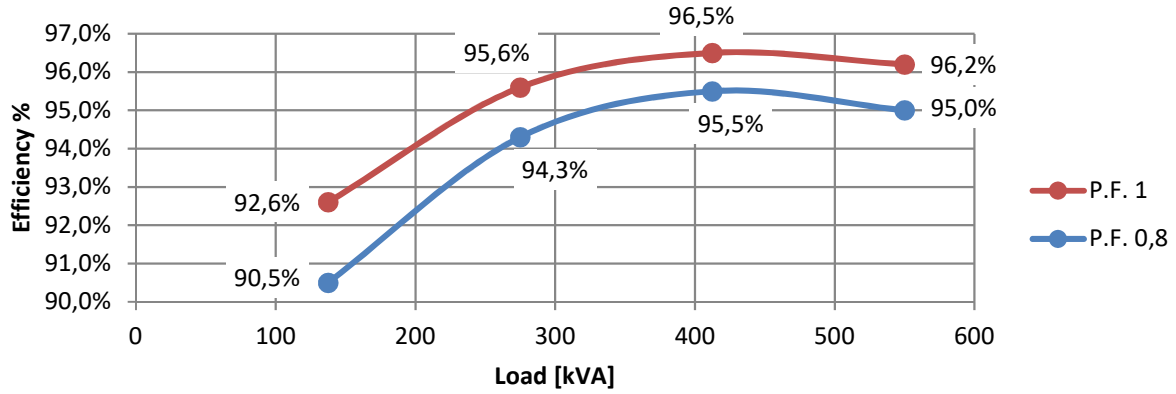


## EFFICIENCY 60Hz

### Efficiency Curves @ 60Hz

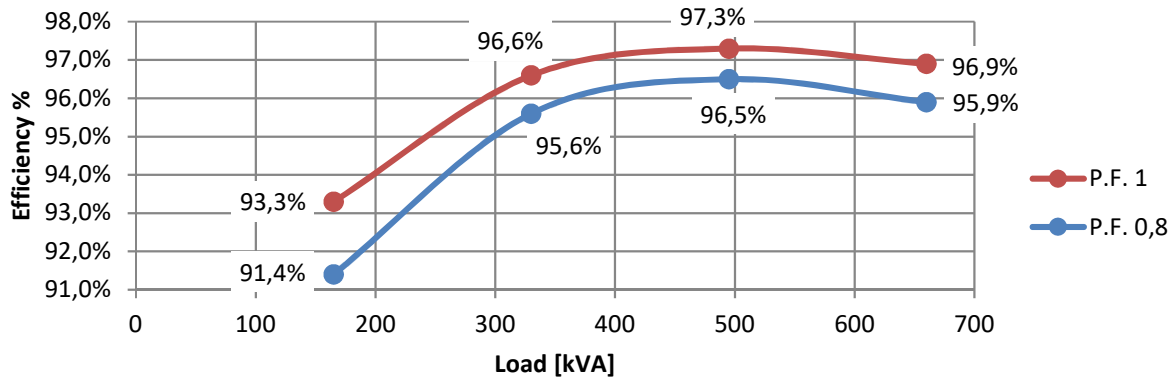


# PRO35S D/4

## FORMA - FORM B3/B14

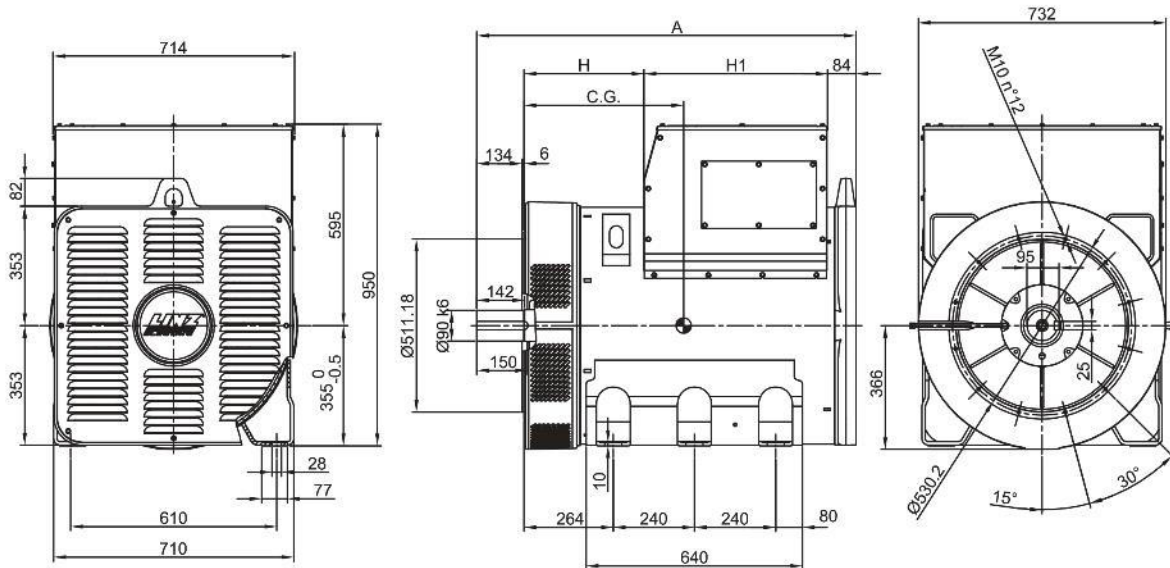

## FORMA - FORM SAE

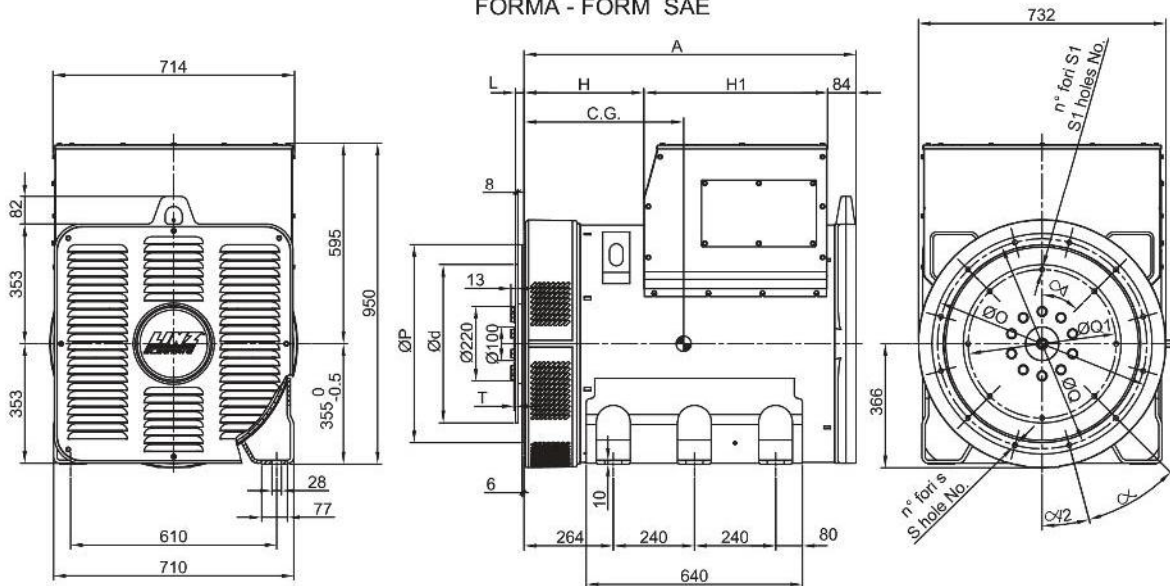

| FORMA - FORM |         | A    | H     | H1    | TIPO - TYPE | C.G. |
|--------------|---------|------|-------|-------|-------------|------|
| B3/B14       | PRO35 S | 1122 | 454.5 | 443.5 | PRO35S B/4  | 456  |
|              | PRO35 M | 1247 | 479.5 | 543.5 | PRO35S C/4  | 466  |
|              | PRO35 L | 1347 | 579.5 |       | PRO35S D/4  | 478  |
| SAE          | PRO35 S | 982  | 454.5 | 443.5 | PRO35M E/4  | 516  |
|              | PRO35 M | 1107 | 479.5 | 543.5 | PRO35M F/4  | 516  |
|              | PRO35 L | 1207 | 579.5 |       | PRO35M G/4  | 539  |
|              |         |      |       |       | PRO35L H/4  | 588  |

| SAE<br>N. | FLANGIE - FLANGES - BRIDAS |        |       |                      |    |       |
|-----------|----------------------------|--------|-------|----------------------|----|-------|
|           | Ø O                        | Ø P    | Ø Q   | n. fori<br>holes No. | S  | α     |
| 0         | 710                        | 647.7  | 679.5 | 16                   | 14 | 22.5° |
| 1/2       | 650                        | 584.2  | 619.2 | 12                   | 14 | 30°   |
| 1         | 552                        | 511.18 | 530.2 | 12                   | 12 | 30°   |

| SAE<br>N. | GIUNTI A DISCO - COUPLING DISCS- JUNTAS A DISCOS |        |        |                      |    |     |     |
|-----------|--|--------|--------|----------------------|----|-----|-----|
|           | L  | Ø d    | Ø Q1   | n. fori<br>holes No. | S1 | α1  | T   |
| 14        | 25.4   | 466.72 | 438.15 | 8                    | 14 | 45° | 4.3 |
| 18        | 15.7   | 571.5  | 542.92 | 6                    | 17 | 60° | 14  |